
CLOU XTRA

AUSTROFLAMM



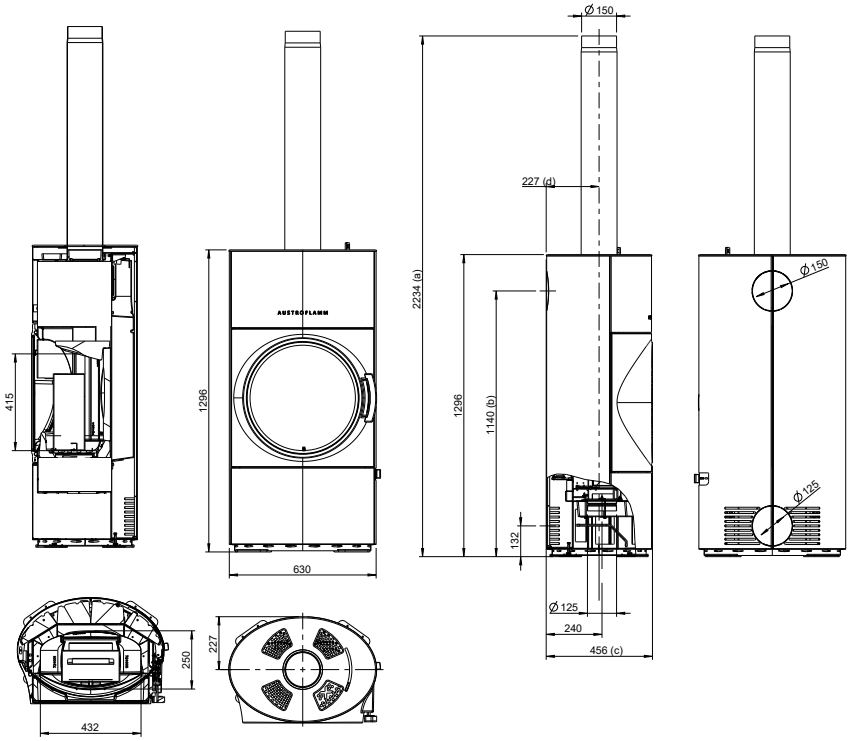

www.austroflamm.com

CLOU XTRA

AUSTROFLAMM

Dimensions and weight	
Height [mm]	1296
Width [mm]	630
Depth [mm]	456
Combustion chamber width [mm]	432
Combustion chamber height [mm]	415
Combustion chamber depth [mm]	250
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1813
Dimensions, b (with Austroflamm elbow piece) [mm]	1140
Dimensions, c (with Austroflamm elbow piece) [mm]	602
Dimensions, d (with Austroflamm elbow piece) [mm]	227
Flue pipe outlet, diameter [mm]	150
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	290
Weight Xtra [kg]	108
Weight, HMS [kg]	NPD
Total weight inc. steel case (STM) [kg]	290
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	200/ 200
Minimum distance to combustible materials – left side dS_1 [mm]	420/ 420
Minimum distance to combustible materials – right side dS_2 [mm]	420/ 420
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1100/ 1100
Minimum distance to combustible materials – floor in front dF [mm]	0/ 0
Minimum distance to combustible materials – bottom dB [mm]	0/ 0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	0/ 0
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	0/ 0
Minimum distance to combustible materials – distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50

Output	
Nominal heat efficiency [kW]	8,0/7,5
Minimum heat output [kW]	NPD/NPD
Maximum heat output [kW]	8.0/ 7.5
Minimum room heating capacity [m³]	145/136
Maximum room heating capacity [m³]	229/ 214
Energy efficiency class	A/A+
Energy efficiency index (EEI)	106/ 114
Direct heat output [kW]	8.0/ 7.5
Indirect heat output [kW]	NPD/NPD
Efficiency at nominal heat output [%]	80/85,5
Efficiency at at part load heat output [%]	NPD/NPD

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	6,6/6,9
Flue gas temperature [°C]	357/ 224
Minimum delivery pressure at nominal heat output [Pa]	12/ 12
at 0.8 times nominal heat output [Pa]	10/10

- not available

073101 06/10/2026
Technical and visual modifications, typographical and printer errors reserved

CLOU XTRA

AUSTROFLAMM

Equipment	
Xtra heat storage technology	standard
Heat Memory System	-
Type of fireplace	Type CA
Ash removal	Ash box

List of abbreviations/index

	Room air independent	**Door lock**
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

073101 06/10/2026
Technical and visual modifications, typographical and printer errors reserved