
DEXTER 2.0 LEFT

AUSTROFLAMM



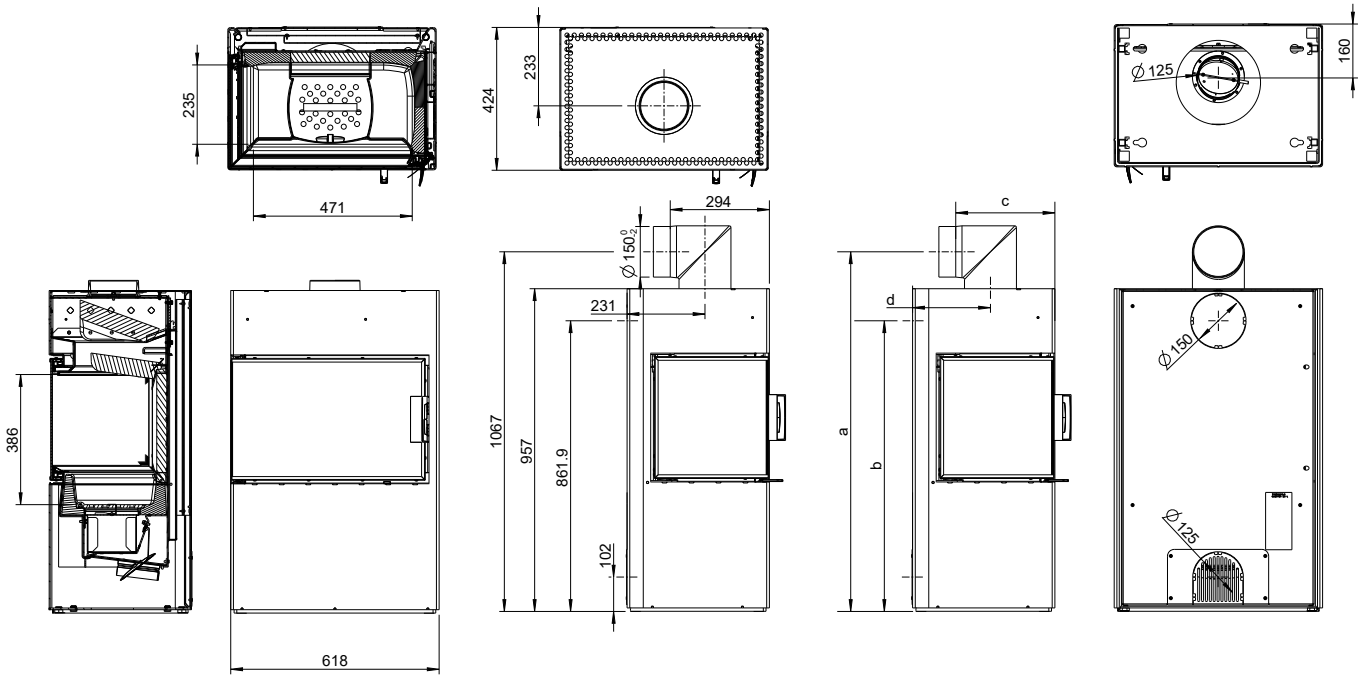

DEXTER 2.0 LEFT

AUSTROFLAMM

Dimensions and weight	
Height [mm]	957
Width [mm]	618
Depth [mm]	424
Combustion chamber width [mm]	471
Combustion chamber height [mm]	386
Combustion chamber depth [mm]	235
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1067
Dimensions, b (with Austroflamm elbow piece) [mm]	862
Dimensions, c (with Austroflamm elbow piece) [mm]	294
Dimensions, d (with Austroflamm elbow piece) [mm]	231
Flue pipe outlet, diameter [mm]	150
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	162
Weight Xtra [kg]	NPD
Weight, HMS [kg]	51
Total weight inc. steel case (STM) [kg]	162
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	100/ 100
Minimum distance to combustible materials – left side dS_1 [mm]	800/ 800
Minimum distance to combustible materials – right side dS_2 [mm]	300/ 300
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1200/ 1200
Minimum distance to combustible materials – floor in front dF [mm]	0/ 0
Minimum distance to combustible materials – bottom dB [mm]	0/ 0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	0/ 0
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	0/ 0
Minimum distance to combustible materials – distance to ceiling dC [mm]	750/ 750
Minimum distance from non-flammable materials [mm]	50/ 50

Output	
Nominal heat efficiency [kW]	6.5/ 6.5
Minimum heat output [kW]	NPD/NPD
Maximum heat output [kW]	6.5/6.5
Minimum room heating capacity [m³]	109/ 109
Maximum room heating capacity [m³]	171/ 171
Energy efficiency class	A/A
Energy efficiency index (EEI)	106/106
Direct heat output [kW]	6.5/ 6.5
Indirect heat output [kW]	NPD/NPD
Efficiency at nominal heat output [%]	80/ 80
Efficiency at at part load heat output [%]	NPD/NPD

Flue gas mass flow at nominal heat output [g/s]	6.0/ 6.0
Flue gas temperature [°C]	326/326
Minimum delivery pressure at nominal heat output [Pa]	12/ 12
at 0.8 times nominal heat output [Pa]	10/ 10

- not available

072101 (li) 24/06/2026
Technical and visual modifications, typographical and printer errors reserved

DEXTER 2.0 LEFT

AUSTROFLAMM

Equipment	
Xtra heat storage technology	-
Heat Memory System	Accessories
External air connection / operation independent of ambient air	Yes
Ash removal	Ash box

- not available

072101 (li) 24/06/2026
Technical and visual modifications, typographical and printer errors reserved