
FYNN XTRA

AUSTROFLAMM



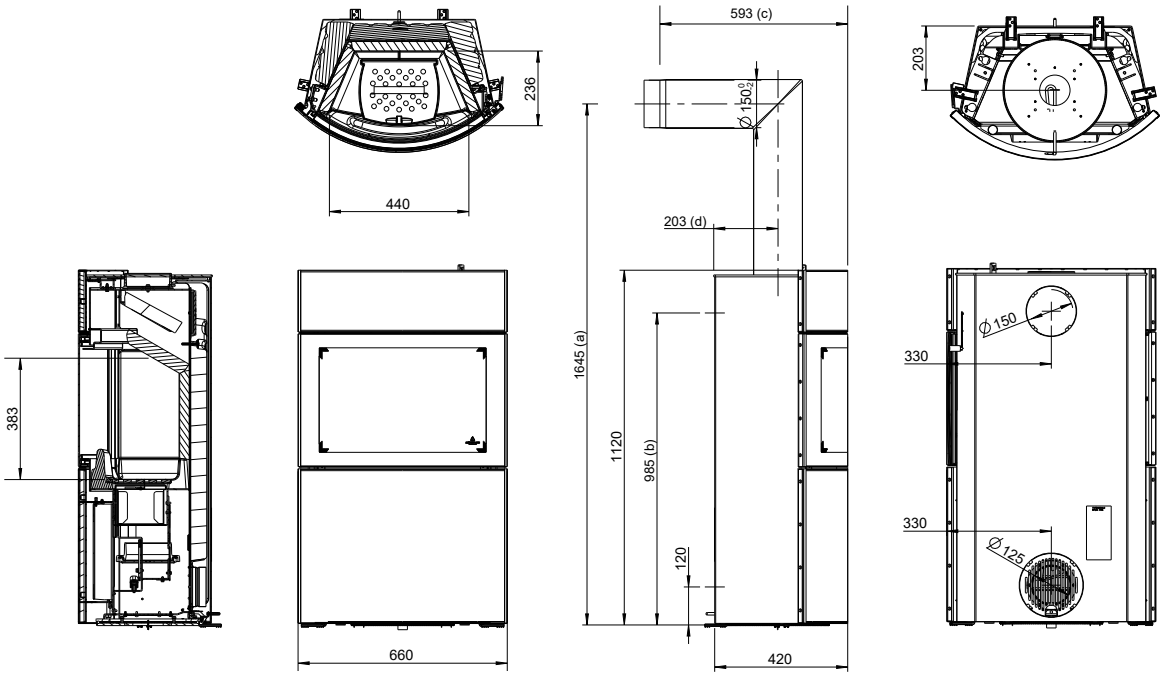

FYNN XTRA

AUSTROFLAMM

Dimensions and weight

Height [mm]	1120
Width [mm]	660
Depth [mm]	420
Combustion chamber width [mm]	440
Combustion chamber height [mm]	383
Combustion chamber depth [mm]	236
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1645
Dimensions, b (with Austroflamm elbow piece) [mm]	985
Dimensions, c (with Austroflamm elbow piece) [mm]	593
Dimensions, d (with Austroflamm elbow piece) [mm]	203
Flue pipe outlet, diameter [mm]	150
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	234
Weight Xtra [kg]	105
Weight, HMS [kg]	NPD
Total weight inc. steel case (STM) [kg]	234
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	230
Minimum distance to combustible materials – left side dS_1 [mm]	330
Minimum distance to combustible materials – right side dS_2 [mm]	330
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	950
Minimum distance to combustible materials – floor in front dF [mm]	1500
Minimum distance to combustible materials – bottom dB [mm]	0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	1500
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	1500
Minimum distance to combustible materials – distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50

Output

Nominal heat efficiency [kW]	6.0
Minimum heat output [kW]	NPD
Maximum heat output [kW]	6.0
Minimum room heating capacity [m³]	109
Maximum room heating capacity [m³]	171
Energy efficiency class	A
Energy efficiency index (EEI)	102
Direct heat output [kW]	6.0
Indirect heat output [kW]	NPD
Efficiency at nominal heat output [%]	77
Efficiency at at part load heat output [%]	NPD

Data for the chimney sweep

Flue gas mass flow at nominal heat output [g/s]	5.9
Flue gas temperature [°C]	350
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10

- not available

071101 05/08/2026
Technical and visual modifications, typographical and printer errors reserved

Equipment	
Xtra heat storage technology	standard
Heat Memory System	-
Type of fireplace	Type CA
Ash removal	Ash box

List of abbreviations/index

	Room air independent	Door lock
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

071101 05/08/2026
Technical and visual modifications, typographical and printer errors reserved