
LUCY COOK

AUSTROFLAMM



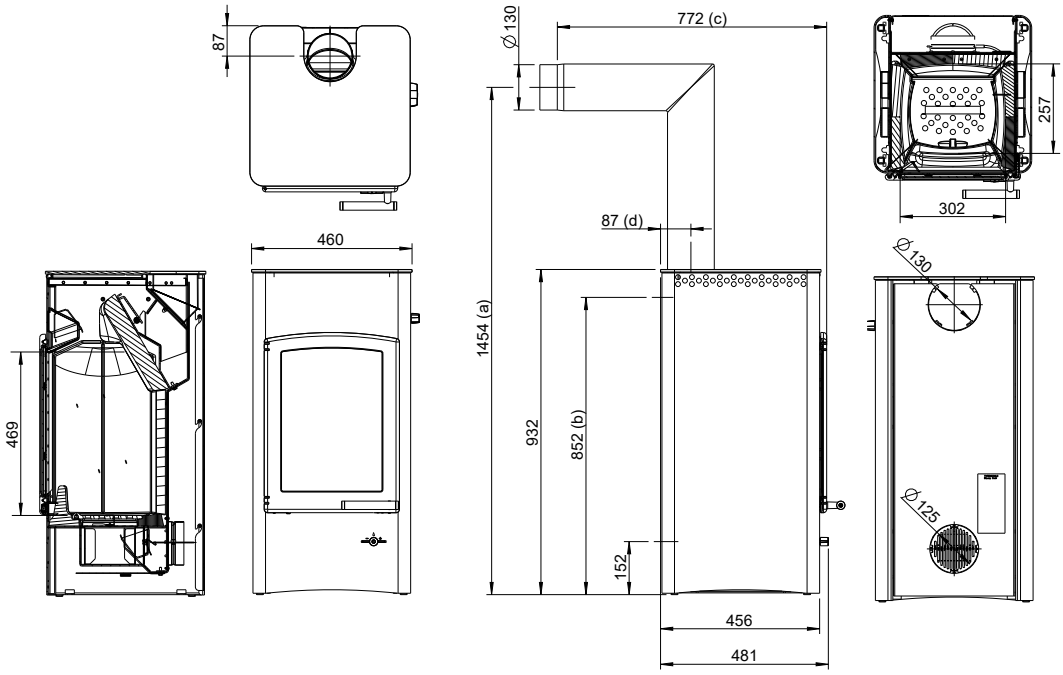

LUCY COOK

AUSTROFLAMM

Dimensions and weight

Height [mm]	932
Width [mm]	460
Depth [mm]	456
Combustion chamber width [mm]	302
Combustion chamber height [mm]	469
Combustion chamber depth [mm]	257
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1454
Dimensions, b (with Austroflamm elbow piece) [mm]	852
Dimensions, c (with Austroflamm elbow piece) [mm]	772
Dimensions, d (with Austroflamm elbow piece) [mm]	87
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	122
Weight Xtra [kg]	-
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	122
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	150
Minimum distance to combustible materials – left side dS_1 [mm]	400
Minimum distance to combustible materials – right side dS_2 [mm]	400
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1100
Minimum distance to combustible materials – floor in front dF [mm]	0
Minimum distance to combustible materials – bottom dB [mm]	0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	0
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	0
Minimum distance to combustible materials – distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50

Output

Nominal heat efficiency [kW]	7.0
Minimum heat output [kW]	NPD
Maximum heat output [kW]	7.0
Minimum room heating capacity [m³]	127
Maximum room heating capacity [m³]	200
Energy efficiency class	A+
Energy efficiency index (EEI)	112
Direct heat output [kW]	7.0
Indirect heat output [kW]	NPD
Efficiency at nominal heat output [%]	84
Efficiency at at part load heat output [%]	NPD

Data for the chimney sweep

Flue gas mass flow at nominal heat output [g/s]	5.9
Flue gas temperature [°C]	264
Minimum delivery pressure at nominal heat output [Pa]	13
at 0.8 times nominal heat output [Pa]	10

- not available

060001 07/09/2026
Technical and visual modifications, typographical and printer errors reserved

LUCY COOK

AUSTROFLAMM

Equipment	
Xtra heat storage technology	-
Heat Memory System	-
Type of fireplace	Type CA
Ash removal	Ash box

List of abbreviations/index

	Room air independent	Door lock
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

060001 07/09/2026
Technical and visual modifications, typographical and printer errors reserved