MO DUO COOK

AUSTROFLAMM



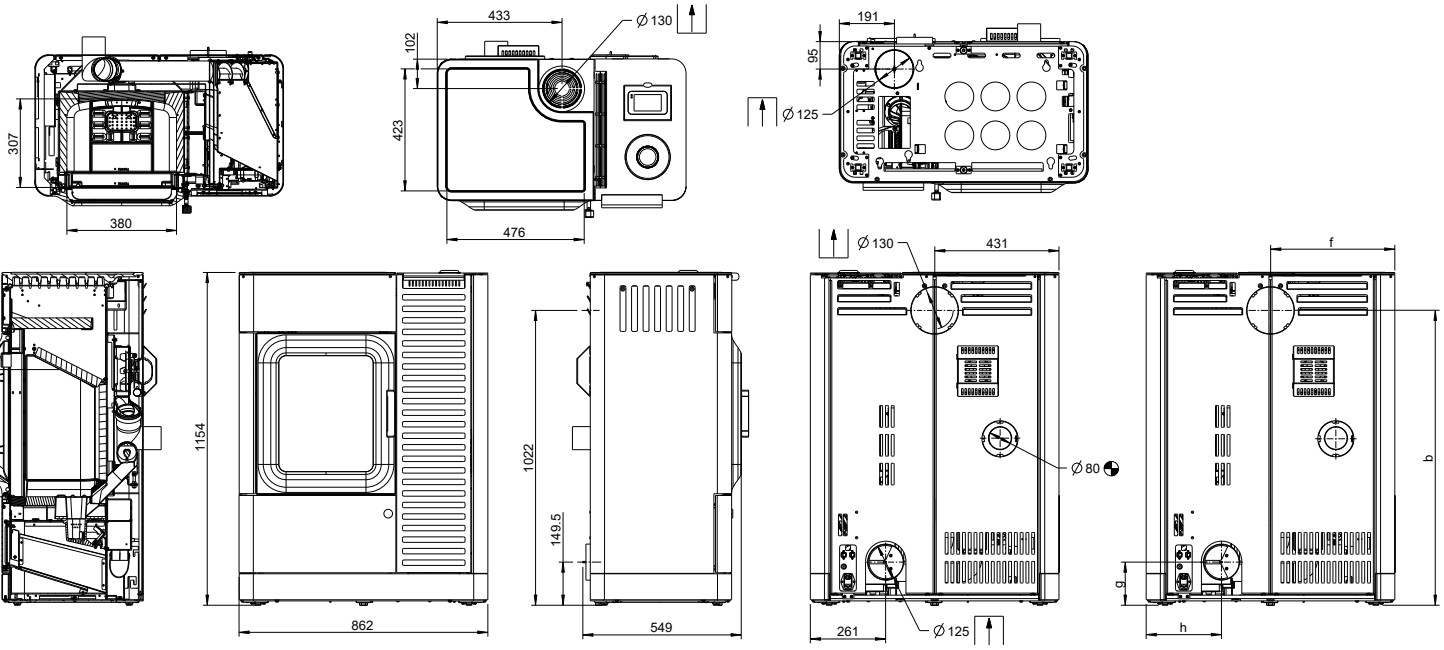

MO DUO COOK

AUSTROFLAMM

Pellet operation

Dimensions and weight	
Height [mm]	1154
Width [mm]	862
Depth [mm]	549
Combustion chamber width [mm]	380
Combustion chamber height [mm]	441
Combustion chamber depth [mm]	307
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	285.5
Weight Xtra [kg]	NPD
Weight, HMS [kg]	55
Total weight inc. steel case (STM) [kg]	293.4
Total weight inc. ceramic case (KGM) [kg]	301.3
Total weight inc. soapstone case (SPM) [kg]	NPD
b: Height of flue pipe connection, centre rear (as per diagram) [mm]	NPD
f: Flue pipe connection from right (as per diagram) [mm]	NPD
g: Height of external air connection, centre (as per diagram) [mm]	149
h: External air connection from left (as per diagram) [mm]	261
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1200/1200
Minimum distance to combustible materials – left side dS_1 [mm]	150/150
Minimum distance to combustible materials - distance to rear dR [mm]	150/150
Minimum distance to combustible materials – right side dS_2 [mm]	150/150
Minimum distance to combustible materials – bottom dB [mm]	0/0
Minimum distance to combustible materials – floor in front dF [mm]	0/0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	550/550
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	550/550
Minimum distance to combustible materials – distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50

Output	
Nominal heat efficiency [kW]	9.4/9.4
Minimum heat output [kW]	4.0/4.1
Maximum heat output [kW]	9.4/9.4
Minimum room heating capacity [m³]	73/75
Maximum room heating capacity [m³]	269/ 269
Pellet hopper capacity [kg/l]	≈ 34/ 51
Minimum fuel throughput [kg/h]	0.9/0.9
Maximum fuel throughput [kg/h]	2.3/2.3
Burning time, minimum [h]	≈ 14/≈ 14
Burning time, maximum [h]	≈ 37/≈ 37
Power connection [V/Hz]	230 / 50
Energy efficiency index (EEI)	123/125
Energy efficiency class	A+/A+
Direct heat output [kW]	9.4/9.4
Indirect heat output [kW]	NPD
Efficiency at nominal heat output [%]	87/ 88.6
Efficiency at at part load heat output [%]	≥ 91/92

- not available

816001 08/07/2026
Technical and visual modifications, typographical and printer errors reserved

MO DUO COOK

AUSTROFLAMM

Equipment	
Room temperature sensor	standard
Weekly timer	standard
Automatic drop grate	standard
Ash removal	Ash box // riddling grate
WLAN module	Accessories
Remote control	Accessories
Air distribution module	Accessories
Type of fireplace	Type CA

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	6.8/7.0
Flue gas temperature [°C]	264/ 225
Minimum delivery pressure at nominal heat output [Pa]	12/12
Minimum delivery pressure for chimney calculation [Pa]	3

Firewood operation

Dimensions and weight	
Height [mm]	1147
Width [mm]	863
Depth [mm]	523
Combustion chamber width [mm]	380
Combustion chamber height [mm]	437
Combustion chamber depth [mm]	307
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	NPD
Dimensions, b (with Austroflamm elbow piece) [mm]	NPD
Dimensions, c (with Austroflamm elbow piece) [mm]	NPD
Dimensions, d (with Austroflamm elbow piece) [mm]	NPD
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	259
Weight Xtra [kg]	NPD
Weight, HMS [kg]	55
Total weight inc. steel case (STM) [kg]	269
Total weight inc. ceramic case (KGM) [kg]	272
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1100
Minimum distance to combustible materials – left side dS_1 [mm]	130
Minimum distance to combustible materials - distance to rear dR [mm]	170
Minimum distance to combustible materials – right side dS_2 [mm]	100
Minimum distance to combustible materials – bottom dB [mm]	0
Minimum distance to combustible materials – floor in front dF [mm]	0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	1500
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	1500
Minimum distance to combustible materials – distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50
Permissible fuel filling quantity [kg/h]	2.0

- not available

816001 08/07/2026
Technical and visual modifications, typographical and printer errors reserved

MO DUO COOK

AUSTROFLAMM

Output	
Nominal heat efficiency [kW]	9.4
Minimum heat output [kW]	NPD
Maximum heat output [kW]	9.4
Minimum room heating capacity [m³]	73
Maximum room heating capacity [m³]	269
Energy efficiency class	A+
Energy efficiency index (EEI)	117
Direct heat output [kW]	9.4
Indirect heat output [kW]	NPD
Efficiency at nominal heat output [%]	≥ 88
Efficiency at at part load heat output [%]	NPD

Equipment	
Xtra heat storage technology	-
Heat Memory System	-
Type of fireplace	Type CA
Ash removal	Ash box // riddling grate

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	6.1
Flue gas temperature [°C]	221
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10

List of abbreviations/index

	Room air independent	**Door lock**
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

816001 08/07/2026
Technical and visual modifications, typographical and printer errors reserved