
TOWER XTRA 2.0

AUSTROFLAMM



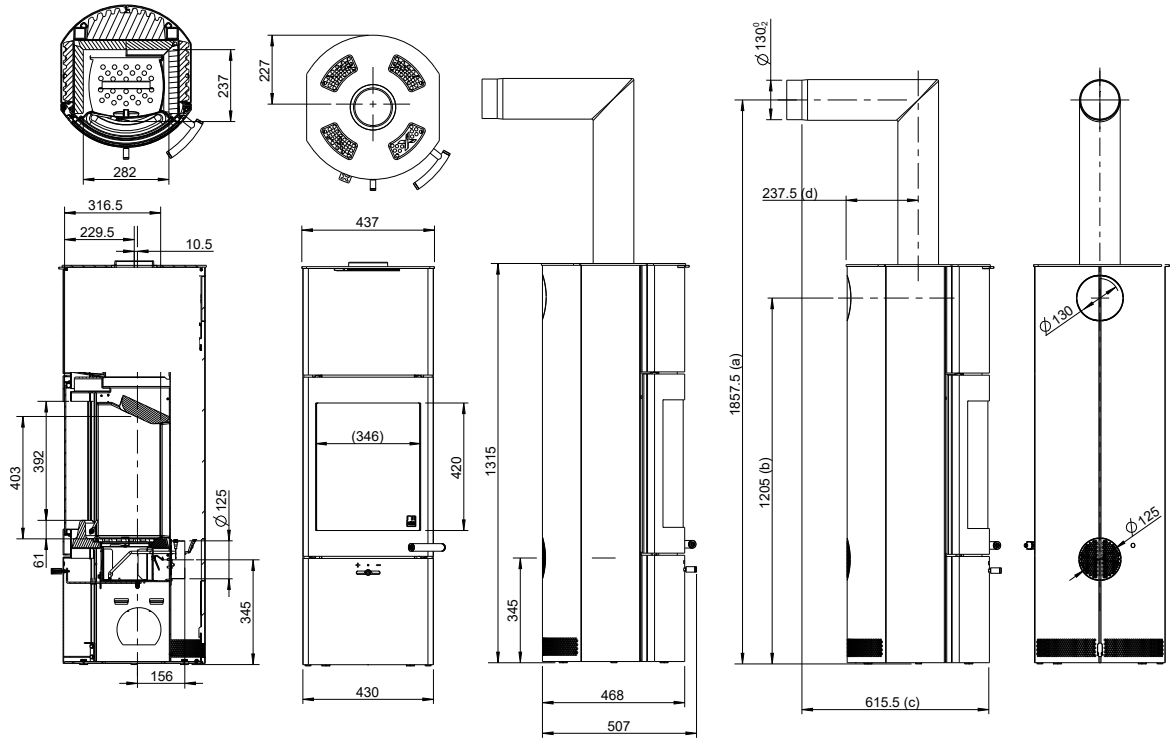

TOWER XTRA 2.0

AUSTROFLAMM

Dimensions and weight	
Height [mm]	1315
Width [mm]	430
Depth [mm]	468
Combustion chamber width [mm]	282
Combustion chamber height [mm]	403
Combustion chamber depth [mm]	137
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1858
Dimensions, b (with Austroflamm elbow piece) [mm]	1205
Dimensions, c (with Austroflamm elbow piece) [mm]	618
Dimensions, d (with Austroflamm elbow piece) [mm]	238
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	249
Weight Xtra [kg]	130
Weight, HMS [kg]	NPD
Total weight inc. steel case (STM) [kg]	249
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	250/250
Minimum distance to combustible materials – left side dS_1 [mm]	600/400
Minimum distance to combustible materials – right side dS_2 [mm]	600/400
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1250/1250
Minimum distance to combustible materials – floor in front dF [mm]	0/0
Minimum distance to combustible materials – bottom dB [mm]	0/0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	0/0
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	0/0
Minimum distance to combustible materials – distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50

The safety distances indicated in this table are to be understood as follows:

Value 1 = Standard version of the stove

Value 2 = Safety distances with optional heat shield

- not available

058006 08/10/2026
Technical and visual modifications, typographical and printer errors reserved

TOWER XTRA 2.0

AUSTROFLAMM

Output	
Nominal heat efficiency [kW]	6.8/7.2
Minimum heat output [kW]	NPD/NPD
Maximum heat output [kW]	6.8/7.2
Minimum room heating capacity [m³]	124/131
Maximum room heating capacity [m³]	194/206
Energy efficiency class	A+/A+
Energy efficiency index (EEI)	109/116
Direct heat output [kW]	6.8/7.2
Indirect heat output [kW]	NPD/NPD
Efficiency at nominal heat output [%]	82/87.2
Efficiency at at part load heat output [%]	NPD/NPD

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	5.2/5.5
Flue gas temperature [°C]	325/235
Minimum delivery pressure at nominal heat output [Pa]	12/11
at 0.8 times nominal heat output [Pa]	10/10

Equipment	
Xtra heat storage technology	standard
Heat Memory System	-
Type of fireplace	Type CA
Ash removal	Ash box

Explanation Type 1 / Type 2

In the following tables, two values are given per attribute.
Value 1 = Type 1: in accordance with standard EN16510
Value 2 = Type 2: in accordance with standard EN16510 and the specific Italian regulations

List of abbreviations/index

	Room air independent	**Door lock**
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

058006 08/10/2026
Technical and visual modifications, typographical and printer errors reserved